

## National Exams May 2012

### 04-Agric-A3, Heat Engineering

3 hours duration


#### **NOTES:**

1. If doubt exists as to the interpretation of any question, the candidate is urged to submit with the answer paper, a clear statement of any assumptions made.
2. This is an OPEN BOOK EXAM.  
A Casio or Sharp approved calculator is permitted.
3. Four (4) questions constitute a complete exam paper.  
The first four questions as they appear in the answer book will be marked.
4. Each question is of equal value.
5. All questions require calculation.

### Problem 1

a) Figure below provides the results of a performance test for a single-glazed flat-plate collector. The transmissivity,  $\tau$ , of the glass is 0.90, and the absorptivity,  $\alpha$ , of the surface is 0.92. For the collector, find;

- a) The collector heat removal factor,  $F_R$
- b) The overall conductance,  $U_L$  in  $\text{Btu}/\text{ft}^2 \cdot ^\circ\text{F}$
- c) The rate at which the collector can deliver useful energy when the irradiation incident on the collector per unit area is  $200 \text{ BTU}/\text{ft}^2 \cdot \text{h}$ , the ambient temperature is  $30^\circ\text{F}$ , and the inlet water temperature is  $60^\circ\text{F}$ .
- d) The collector temperature when the flow rate is zero (collector efficient  $\eta=0$ ).

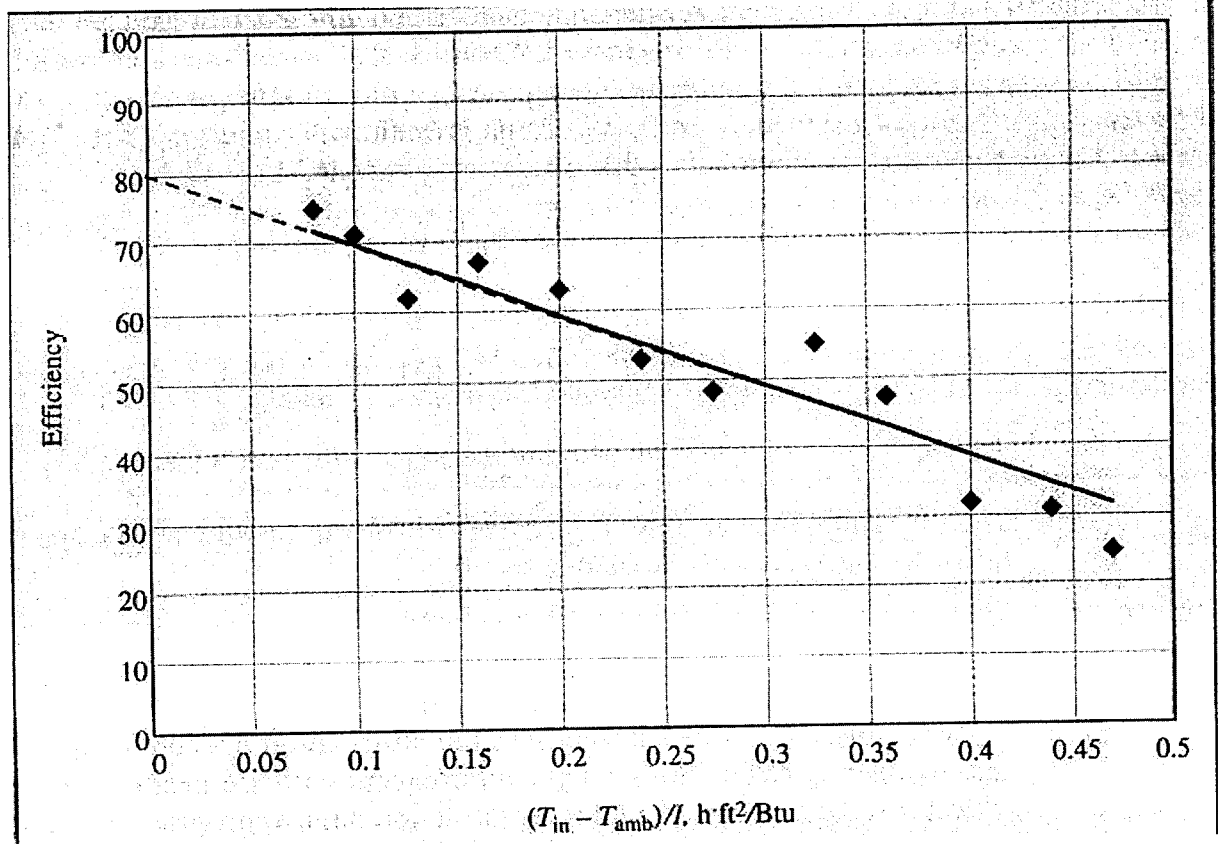



## Problem 2

Water at 20°C flows through a small-bore tube 1 mm in diameter at a uniform speed of 0.2 m/s. The flow is fully developed at a point beyond which a constant heat flux of 6000 W/m<sup>2</sup> is imposed. How much farther down the tube will the water reach 74°C at its hottest point?  
(Water at T=47°C, k=0.6367 W/m.K,  $\alpha=1.541 \times 10^{-7}$  m<sup>2</sup>/s,  $\nu=0.556 \times 10^{-6}$  m<sup>2</sup>/s).

### Problem 3

A jet of liquid metals at  $2000^{\circ}\text{C}$  pours from a crucible. It is 3mm in diameter. A long cylindrical radiation shield, 5 cm in diameter, surrounds the jet through an angle of  $330^{\circ}$ , but there is a  $30^{\circ}$  slit in it. The jet and the shield radiate as black bodies. They sit in a room at  $30^{\circ}\text{C}$ , and the shield has a temperature of  $700^{\circ}\text{C}$ . Calculate the net heat transfer; from the jet to the room through the slit (view factor  $F_{\text{jet-room}} = 0.08333$ ); from the jet to the shield (view factor  $F_{\text{jet-shield}} = 0.9167$ ); and from the inside of the shield to the room (view factor  $F_{\text{slit-jet}} = 0.0600$ , view factor  $F_{\text{shield-room}} = 0.08545$ )

#### Problem 4

A thin-walled metal tank containing fluid at  $40^{\circ}\text{C}$  cools in air at  $14^{\circ}\text{C}$  ( $\beta=0.00348\text{ K}^{-1}$ ); the average natural convection heat transfer coefficient  $h$  is very large inside the tank. If the sides are  $0.4\text{ m}$  high, compute  $h$ , the average heat flux  $q$ , and the thermal boundary layer thickness  $\delta$  at the top.

(Air properties at  $27^{\circ}\text{C}$ ,  $\alpha=2.203\times 10^{-5}\text{ m}^2/\text{s}$ ,  $\nu=1.556\times 10^{-5}\text{ m}^2/\text{s}$ ,  $\text{Pr}=0.711$ )